

THE COPYRIGHT IN THIS WORK IS VESTED IN THISTLE DESIGN (MMC) LIMITED AND THE DOCUMENT IS ISSUED IN CONFIDENCE FOR THE PURPOSE ONLY FOR WHICH IT IS SUPPLIED. IT MUST NOT BE REPRODUCED IN WHOLE OR IN PART OR USED FOR TENDERING OR MANUFACTURING PURPOSES EXCEPT UNDER AGREEMENT OR WITH THE CONSENT IN WRITING OF THISTLE DESIGN (MMC) LIMITED AND THEN ONLY ON THE CONDITION THAT THIS NOTICE IS INCLUDED IN ANY SUCH REPRODUCTION

3RD ANGLE PROJECTION


DIMENSIONS IN MM / INCHES

Supply :- +5V d.c. $\pm 250\text{mV}$ at 150mA

Outputs :- A :- Is the output from a ZTX313 transistor (or equivalent) pulled up to +5V by a 1K ohm resistor.


B :- As above but output B leads output A by 90° nominal. (see typical output waveform diagram)

Termination :- 2 Metres, 4 way P.V.C. screened cable, leads 7/0.2 P.V.C. insulated conductive resistance 0.092 ohms/metre to DEF. STAN. 61-12 Pt 4

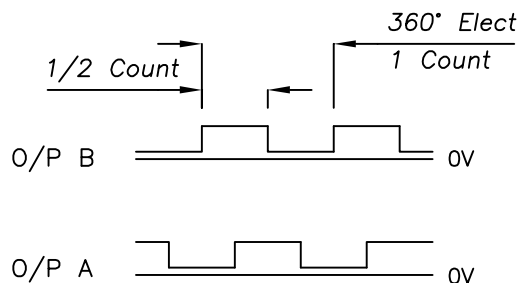

Clockwise shaft rotation
viewed from shaft end

TYPICAL OUTPUT WAVEFORM

A		14.07.2005		ALTERATION		APPD	
PROD DRG No.		 THISTLE DESIGN LOANHEAD SCOTLAND		DRN		DATE	
THIS SPECIFICATION IS ISSUED BY THISTLE DESIGN (MMC) LIMITED TO DEFINE THE ELECTRICAL, MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS OF THE COMPONENT COVERED BY THE SPECIFICATION NUMBER GIVEN HERE-ON. ANY PARAMETER NOT DEFINED HERE-ON MAY NOT BE INFERRED FROM ANY OTHER DOCUMENT ISSUED BY THISTLE DESIGN (MMC) LIMITED.				TITLE			
15HI Series Incremental Encoder – Electrical				SPEC No. 15hi-elec.pdf			